


# IRONERS

TFI 6026 • 6032

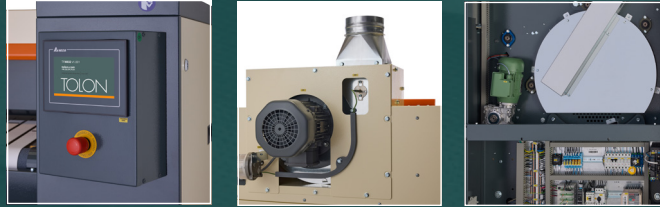

## STANDARD FEATURES & BENEFITS

- Ergonomic cylinder heated ironer
- Gas or electric heating
- Extended heat transfer path
- Large surface contact with linen
- Roll standard with chrome surface coating for better thermal and highly resistant to corrosion, even after periods of inactivity conduction
- Finger protection panel and emergency button for more safety
- Easy to use electronic control with pre-set ironing programmes
- Indication of ironing temperature and speed
- Frequency controlled motor
- Reverse mode possible
- Space-saving wall model with front return of the linen
- Overheating check system with 2 temperature sensors
- Premix burner for more power and efficient ironing
- LED lights on the ironing width for good visibility and operation

## OPTIONS

- Longitudinal fold
- 3 folding sensors at feeding point instead of 1
- Transport wheels
- Rear output of the linen

TOLON

# IRONERS

## TFI 6026 · 6032

MODEL	UNIT	TFI 6026	TFI 6032
<b>CAPACITY</b>			
Roller diameter	mm	600	600
Working width	mm	2600	3200
Roller speed	m/min	3,5-12	3,5-12
Performance <sup>1 2</sup>	Electrical fold. kg/h	145-162	180-200
<b>ELECTRIC HEATING</b>			
Electric heating power <sup>3</sup>	kW	56	69
Evaporation rate	l/h	191080	235438
Electric consumption	kW/h	65	80
<b>GAS HEATING</b>			
Gas heating power	kW	65	80
	Btu	221789	272971
Evaporation rate	Electrical fold. l/h	80	100
Gas connection Ø	DN	20	20
	BSP	¾"	¾"
Gas pressure	Natural gas mbar	20-50	20-50
Gas consumption	Natural gas m³/h	6,7	8,3
	kW/h	65	80
	Btu/h	221789	272971
Electric consumption	kW/h	2,2	2,2
<b>VOLTAGE/ELECTRIC CONNECTION</b>			
Electric heated models			380-415V 3AC + N 50Hz 380-415V 3AC + N 60Hz 440-480V 3AC 50Hz 440-480V 3AC 60Hz
Gas heated models			380-415V 3AC + N 50Hz 380-415V 3AC + N 60Hz 440-480V 3AC 50Hz 440-480V 3AC 60Hz 200-240V 3AC 50Hz 200-240V 3AC 60Hz 200-240V 1AC 50/60Hz
<b>ELECTRIC RATING (MOTORS)</b>			
Roller motor	kW	0,75	0,75
Fan motor	kW	1,1	1,1
<b>EXHAUST</b>			
Exhaust connection Ø	mm	125	125
Airflow	Electric m³/h	1125	1125
	Gas m³/h	1125	1125
<b>DIMENSIONS (WxDxH)</b>			
Net - Standard	Electric mm	3488 x 1440 x 1727	4088 x 1440 x 1727
Net - Rear Exit	Electric mm	N/A	4088 x 1647 x 1827
Packed - Standard	All heating&folding mm	3550 x 1650 x 1917	4150 x 1650 x 1917
Packed - Rear Exit	All heating&folding mm	3550 x 1817 x 1917	4150 x 1817 x 1917
<b>WEIGHT</b>			
Net - Standard	Electric kg	1700	1910
Packed - Standard	Electric kg	1802	2050
<b>SOUND PRESSURE</b>			
Sound level	db(A)	< 65,6	< 65,6

<sup>1</sup> 50% moisture

<sup>2</sup> Output calculated for: Pneumatic Folding option at 6 m/min / Electrical Folding option at 9m/min

<sup>3</sup> Output calculated at 380V / 3 phase