


IRONERS

TFI 3516 • 3521

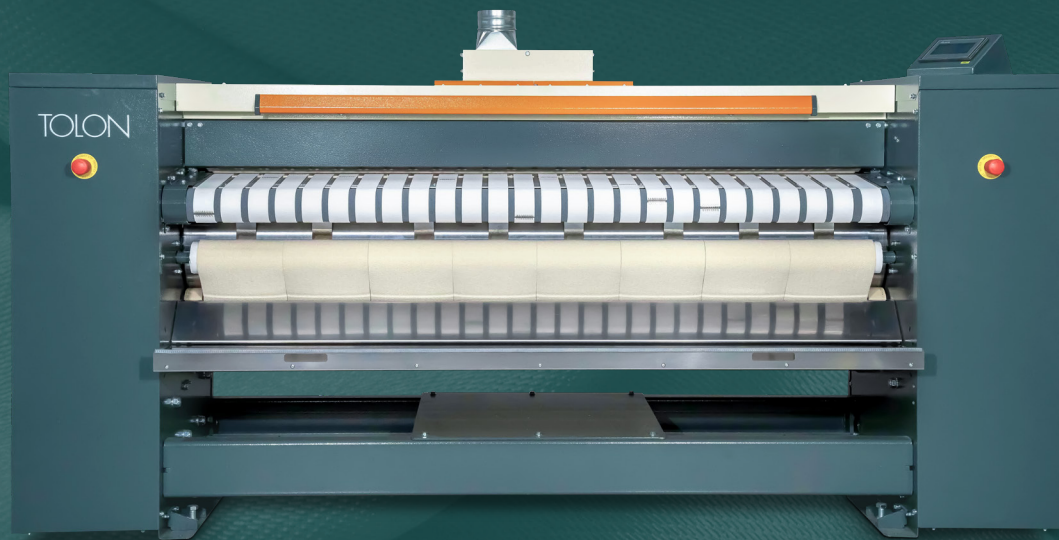

STANDARD FEATURES & BENEFITS

- Ergonomic cylinder heated ironer
- Gas or electric heating
- Extended heat transfer path
- Large surface contact with linen
- Roll standard with chrome surface coating for better thermal and highly resistant to corrosion, even after periods of inactivity conduction
- Finger protection panel and emergency button for more safety
- Easy to use electronic control with pre-set ironing programmes
- Indication of ironing temperature and speed
- Frequency controlled motor
- Reverse mode possible
- Space-saving wall model with front return of the linen
- Overheating check system with 2 temperature sensors
- Premix burner for more power and efficient ironing
- LED lights on the ironing width for good visibility and operation

TOLON

IRONERS

TFI 3516 · 3521

MODEL	UNIT	TFI 3516	TFI 3521
CAPACITY			
Roller diameter	mm	350	350
Working width	mm	1650	2100
Roller speed	m/min	1-7	1-7
Performance *	Gas kg/h	68	85
ELECTRIC HEATING			
Electric heating power **	kW	24	30
Evaporation rate	l/h	18	25
Electric consumption	kW/h	25	31
GAS HEATING			
Gas heating power	kW	30	37
	Btu	102364	126249
Evaporation rate	l/h	26	34
Gas connection Ø	DN	20	20
	BSP	¾"	¾"
Gas pressure	Natural gas mbar	20	20
Gas consumption	Natural gas m³/h	3,1	3,8
	kW/h	30	37
	Btu/h	102364	126249
	Electric consumption kW/h	1,3	1,3
VOLTAGE/ELECTRIC CONNECTION			
Electric heated models		380-415V 3AC + N 50Hz	
		380-415V 3AC + N 60Hz	
		440-480V 3AC 50Hz	
		440-480V 3AC 60Hz	
Gas heated models		380-415V 3AC + N 50Hz	
		380-415V 3AC + N 60Hz	
		440-480V 3AC 50Hz	
		440-480V 3AC 60Hz	
		200-240V 3AC 50Hz	
		200-240V 3AC 60Hz	
	200-240V 1AC 50/60Hz		
ELECTRIC RATING (MOTORS)			
Roller motor	kW	0,37	0,37
Fan motor	kW	0,75	0,75
EXHAUST			
Exhaust connection Ø	mm	110	110
Airflow	Electric m³/h	410	410
	Gas m³/h	410	410
DIMENSIONS (WxDxH)			
Net - Standard	Electric mm	2524 x 990 x 1340	2944 x 990 x 1340
	Gas mm	2524 x 990 x 1340	2944 x 990 x 1340
Packed - Standard	Electric mm	2580 x 1010 x 1480	3000 x 1010 x 1480
	Gas mm	2580 x 1010 x 1480	3000 x 1010 x 1480
WEIGHT			
Net - Standard	Electric kg	725	800
	Gas kg	685	735
Packed - Standard	Electric kg	765	890
	Gas kg	690	795
SOUND PRESSURE			
Sound level	db(A)	< 60	< 60

* Sheets 160 x 200cm - 125g/m² gas heated (63 in x 78,7 in - 0,026 lb/ft²)

** Output calculated at 380V / 3 phase